


# OMG FOR INDUSTRIES



FH



BAH



TA.CP



TA



TAV Digital




MOx




HT



VH



MT-TC-TC3

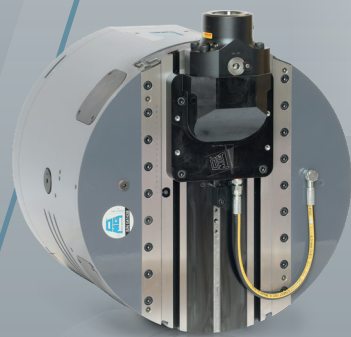

## FH series Facing Heads

- Available in 4 sizes
- Gears with reduction ratio 3:1, 4:1, 6:1
- Radial positioning system of the slide directly mounted onto rotating part



## TA series Angle Heads

### TA - Right angle heads

- Available in 25 sizes
- Max. drilling capacity 26 mm
- 90° between axis head and spindle




### TAL - Light Angle Heads

- Available in 6 different sizes
- Body in aluminum
- Drilling and milling operations



### TA...2P - Two spindle right angle heads

- Available in 6 sizes
- Max. drilling capacity 26 mm
- Two spindles 180 degrees apart



### TAO - Offset angle heads

- Available in 5 sizes
- Drilling capacity max 20 mm
- Coolant in through shank center, out through head's spindle at 40 bar



### TAF - Fixed angle heads

- Available in 3 sizes
- Max. drilling capacity 20 mm
- Fixed angle according to customer request



## BAH series The Big Technology for the Big Industry

- Body in cast iron
- Manual or automatic tool change
- Standard tool-holders coupling: DIN69871, DIN2080, BT, HSK, Coromant Capto



## TA.CP series Light Duty Angle Heads

- Available in 7 sizes
- Max. drilling capacity 16 mm
- 90° between axis head and spindle



## TAV Digital series Adjustable Angle Heads

- Available in 5 sizes
- Max. drilling capacity 20mm
- Adjustable angle from +90° to -90°C between axis head and spindle



## HT series Revolving Turrets

- Available in 4 sizes with max. 12 spindles
- Turret heads with crown Hirth clamping
- Max. spindle speed 12.000 RPM



## MOx series Spindle Speeders

- High precision spindle speeders
- Available in 6 sizes
- Max. 36.000 RPM
- Max drilling capacity 34 mm



## MT-TC-TC3 series Fixed Multi-spindle Heads


### MT - Flexible multi-spindle heads with fixed spindle positions

- Max. drilling capacity 10 mm
- Min. center distance 9 mm
- Especially suitable for drilling holes with narrow center distance



### TC - Flexible multi-spindle heads with fixed centers distance

- Max. drilling capacity 22 mm
- Min. center distance 16 mm
- 40 different types of spindles



### TC3 - Flexible multi-spindle heads with fixed spindle positions

- Max. drilling capacity 32 mm
- Min. center distance 26 mm
- 39 different types of spindles



## VH series Variable Axis Heads

- Available in 51 size with 1-2-3-4 spindles
- Max. drilling capacity 25 mm
- Min. center distance 12 mm
- Max. drilling area Ø 300 mm